

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number  
**WO 2005/084985 A1**

(51) International Patent Classification<sup>7</sup>: **B60K 1/04**,  
H01M 2/10

(21) International Application Number:  
PCT/IB2005/000470

(22) International Filing Date: 24 February 2005 (24.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2004-057931 2 March 2004 (02.03.2004) JP

(71) Applicant (for all designated States except US): **TOYOTA JIDOSHA KABUSHIKI KAISHA** [JP/JP]; 1, Toyotacho, Toyota-shi, Aichi-ken 471-8571 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WATANABE, Ko** [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, of 1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP). **NAGASE Syuji** [JP/JP]; 5-4-12, Nishi-Hashimoto, Sagamihara., Kanagawa 229-1131 (JP).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

[Continued on next page]

(54) Title: MOUNTING STRUCTURE FOR STORAGE BATTERY DEVICE

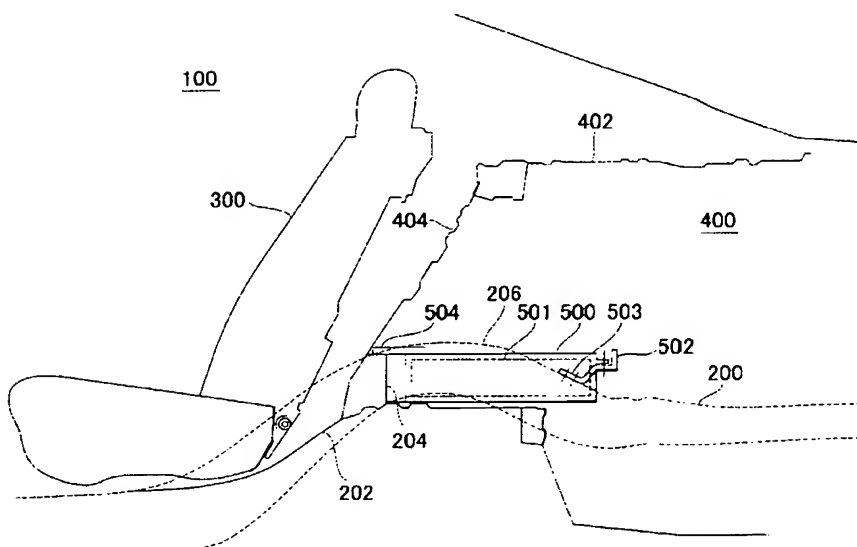

(57) Abstract: Two side members (200) are provided so as to be in side portions of a vehicle (100). Each side member (200) is provided with a kick-up portion (206) curved upward. A cross member (204) is provided so as to interconnect side surfaces of forward portions of the kick-up portions (206) of the two side members (200). A forward portion of a battery pack (500) is fixed to an upper surface of the cross member (204) via forward brackets (504) welded to the forward portion of the battery pack (500). A rearward portion of the battery pack (500) is fixed to upper surfaces of rearward portions of the kick-up portions (206) of the two side members (200) via a bridge (502) provided so as to interconnect the two side members (200).

WO 2005/084985 A1



**(48) Date of publication of this corrected version:**

1 December 2005

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(15) Information about Correction:**

see PCT Gazette No. 48/2005 of 1 December 2005, Section II